

# TempTale® GEO XP


## Intelligent Shipment Visibility to -95°C

The TempTale® GEO XP enables global, real-time shipment location tracking with validated, GXP-compliant temperature monitoring. Tailored for temperature-sensitive life sciences products, the TempTale GEO XP solution proactively notifies logistics and partners, providing in-transit visibility and alerts, speeding product release by automating data sent to the cloud.

The TempTale GEO XP solution monitors shipments down to -95°C, generating an alert if the temperature goes beyond the product's limits. Built-in battery management simplifies device management. Gain crucial insights into what occurred during your shipment to support root cause analysis.

### Key Features and Benefits


- Small IoT device fits most packaging
- Arrives fully charged and ready to use
- Immediate, real-time temperature, light, humidity, and location notifications, with option to add control tower escalation services
- Communicates as frequently as every 15 minutes and immediately upon alarm
- Global cellular communication coverage, with added Wi-Fi locates for precise proof of delivery
- Non-lithium battery (no IATA dangerous goods declaration)
- No worries about device battery life
- Mark hardware time stamp indicating re-icing
- Up to 6 hardware alarms and up to 12 software alarms to speed product release
- Dual temperature monitoring, internal (probe) and external (ambient)
- Each device is individually 3-point NIST calibrated before every use, with a Certificate of Calibration
- Failsafe, secondary download with Bluetooth and the TempTale App (iOS and Android)

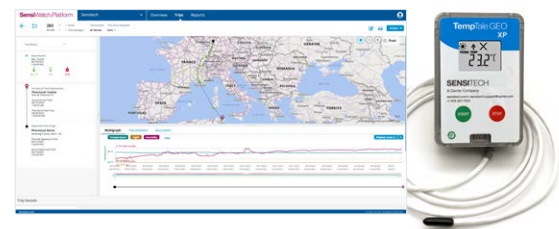

**SensiWatch® Platform** provides end-to-end visibility and alerts while in-transit. Take advantage of real-time data and notifications:

- Delays and missed flights
- Port congestion, extended dwell times
- Proximity of arrival
- Trailer door opened
- Early warning temperature trending beyond limits

### A convenient route to reducing CO<sub>2</sub> emissions and supply chain waste

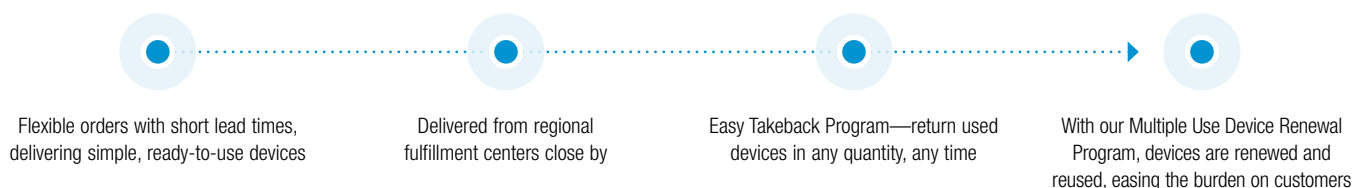

TempTale® GEO XP Specifications	
<b>Recording Option</b>	Single Use (for Shippers), Sensitech Manages Multiple Use Device Renewal Program
<b>Certified Modes of Transport</b>	Air, Ocean, Road, Rail (Airline approvals upon request)
<b>Sensor Types</b>	Temperature, Humidity, Light
<b>Probe Temperature Measurement Range</b>	-95°C to +55°C (Probe placed inside payload next to product)
<b>Probe Temperature Accuracy Range</b>	±0.5°C from -10°C to +45°C ±1.5°C from -95°C to -10°C; ±1.5°C from +45°C to +55°C
<b>Core Device Operating Range</b>	-10°C to +55°C (Core device stays outside of dry ice environment)
<b>Core Device Temperature Accuracy Range</b>	± 0.5°C from -10°C to +45°C ± 1.0°C from +45°C to +55°C
<b>Humidity Measurement Range</b>	10% to 90% RH, non-condensing
<b>Humidity Accuracy Range</b>	Typical ±3.0% / Max ±5.0% RH from 10% to 90% RH
<b>Alarms</b>	<ul style="list-style-type: none"> <li>• Up to 6 hardware (Single Temp Limit, Temp Range, Dual Temp Range, MKT, Duration) and up to 12 software alarms; alarm is triggered when temperature exceeds set limits</li> <li>• Single-Event (Continuous) or Cumulative</li> <li>• Dual Sensing (high/low alarms): Probe + Ambient or Probe + Humidity</li> </ul>
<b>Temperature Accuracy Certification</b>	Individual 3-point NIST® Traceable Calibration per monitor before each use, Certificate of Calibration with order, by Request or Calibration Portal
<b>Temperature Sensor Sample Interval</b>	Programmable from 5 minutes to 2 hours
<b>Temperature Measurement Responsiveness</b>	Meets the requirements of USP <1079.3> and EN12830
<b>Start Up Delay</b>	0 minutes to 24 hours
<b>Light Sensor Range</b>	0-100%
<b>Communication</b>	LTE CAT-M1 (for 4G/5G networks) with 2G fallback
<b>Memory</b>	16,000 data points per sensor
<b>Battery Type</b>	Non-lithium, Alkaline (non-replaceable)
<b>Shelf Life &amp; Sustainability</b>	<ul style="list-style-type: none"> <li>• 6-month shelf life (press start by use by date, shipper operations simple)</li> <li>• Sensitech manages renewal of returned devices for reuse. No lost device fees.</li> </ul>
<b>Operating Life</b>	Up to 60 days, with communication reporting interval from 15 minutes to 180 minutes; Configurable based on total days for shipment. (For longer shipments see TempTale® GEO XEP for up to 120 days)
<b>Location</b>	Cellular and Wi-Fi
<b>Dimensions and Weight</b>	91 mm x 61 mm x 31 mm; Probe length 1 meter or 3 meters; 184 grams
<b>Environmental Rating</b>	IP64
<b>Regulatory</b>	FCC, CE, IC, RTCA – D0160G, 3-Point NIST Traceable Calibration (each device individually calibrated)
<b>Display Indicators</b>	LCD screen icons: Running, Started, Stopped, Alarm Status, Start-up Delay, Marked Event, Uploading to Cloud, Upload to Cloud Complete, Final Cloud Upload requires APP, Bluetooth On
<b>Secondary Download</b>	TempTale® Mobile App (iOS 15+—iPhone 7 or higher, Android 12+—Samsung Galaxy S8+ or Note 8+, Bluetooth Low Energy)
<b>Software Interfaces</b>	SensiWatch® Platform; email notifications; ColdStream® Select 2.2+ (designed to meet FDA 21 CFR Part 11 and EC Annex 11); TempTale® App 3.1+; TempTale® Manager Desktop 9.1+
<b>Cold Chain PDF Report</b>	Secure PDF generated by cloud software
<b>Minimum System Requirements</b>	Windows 8.1+; Mac OSX 10.12+; Browsers: Google Chrome 83+, Microsoft Edge 83+, Safari 14+; Adobe® Reader 9.0+

*Sensitech has performed all necessary testing and can provide documentation supporting our compliance at your request.*

Sensitech Inc. is a global leader in delivering supply chain visibility solutions. Our innovative monitoring products and services help to maintain the quality and integrity of our customers' valuable products at every step in their journey, all around the world. For 30 years, leading companies in the food, pharmaceutical, industrial, consumer goods and other industries have relied on Sensitech to help protect their products—and their bottom lines. All trademarks and service marks are property of their respective owners. Visit [www.sensitech.com](http://www.sensitech.com) for additional information. ©2024 Carrier. All Rights Reserved.

Sensitech Inc. • Global Headquarters • 800 Cummings Center • Suite 258X • Beverly, MA 01915-6197  
1-800-843-8367 • +1-978-927-7033 • Fax: +1-978-921-2112 • [sensitech.clientservices@carrier.com](mailto:sensitech.clientservices@carrier.com)